


# ECLIPSE ROUND 250 7249

SKU 1333002

astro

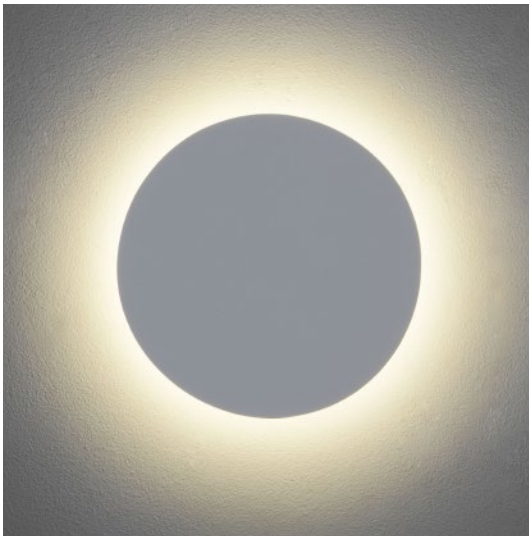

## PRODUCT SPECIFICATION

### GENERAL

<b>FINISH:</b>	Plaster	<b>CABLE LENGTH:</b>	Not Applicable
<b>MAIN MATERIAL:</b>	Plaster	<b>GROSS WEIGHT:</b>	2.0 (kg)
<b>DIMENSIONS:</b>	D: 38mm Ø: 250mm	<b>CLASS:</b>	CE (Class I)
<b>INSTALLATION ORIENTATION:</b>	Wall Mount - Vertical	<b>IP RATING:</b>	IP20
<b>CUT OUT HOLE:</b>	Not Applicable	<b>BATHROOM ZONE:</b>	Zone 3
<b>RECESS DEPTH:</b>	Not Applicable	<b>VOLTAGE:</b>	Mains 230V
<b>FIRE RATING:</b>	Not Applicable	<b>PRODUCT F MARK:</b>	Suitable for mounting on flammable materials


### LAMP

<b>LIGHT SOURCE:</b>	per m LED strip	<b>MACADAM ELIPSE:</b>	Not Applicable
<b>MAXIMUM WATTAGE:</b>	8W	<b>UGR:</b>	To Be Advised
<b>MAXIMUM LAMP LENGTH:</b>	Not Applicable	<b>BEAM ANGLE:</b>	Not Applicable
<b>LAMP INCLUDED?</b>	Yes (Integral)	<b>TILT ADJUSTMENT ANGLE:</b>	Not Applicable
<b>LUMINOUS FLUX:</b>	452.4 (lm)	<b>ROTATION ADJUSTMENT ANGLE:</b>	Not Applicable
<b>COLOUR TEMP:</b>	3000 (K)	<b>AVERAGE LIFESPAN:</b>	Not Applicable
<b>CRI:</b>	60	<b>L70:</b>	To Be Advised
<b>R9:</b>	To Be Advised		


### ELECTRICAL

<b>SWITCHED:</b>	No	<b>SUPPLY FREQUENCY:</b>	50/60 (Hz)
<b>DIMMABLE:</b>	No	<b>DRIVER / BALLAST VOLTAGE:</b>	220-240 (V)
<b>DIMMING METHOD:</b>	Not Applicable	<b>DRIVER AVERAGE LIFESPAN:</b>	30,000 (Hrs)
<b>DRIVER OUTPUT CURRENT:</b>	Not Applicable	<b>EFFICACY:</b>	43.3 (lm/W)
<b>DRIVER OUTPUT VOLTAGE:</b>	12 (V)	<b>DRIVER / BALLAST INCLUDED?</b>	Yes (Integral)

## ADDITIONAL INFORMATION



THIS PRODUCT CAN BE SPRAY PAINTED



BOX QUANTITY X6

# PRODUCT ELEVATIONS

---

