



Product Specification

| | |
|---|--|
| <p>Model No. 400377-BL</p> | <p>Product Line Drawing</p> |
|  |  |

General

| | |
|-----------------|--------------------------------|
| Description | LED Floodlight 50W 4000K Black |
| Watts | 50 |
| IP Rating | 65 |
| Mounting | Adjustable Bracket |
| Driver | Meanwell |
| Chip Brand | Epistar |
| Dimensions | 285 x 236 x 170 |
| Net Weight (KG) | 2.94 |

Electrical/Wiring

| | |
|------------------------|-------------------------|
| Input Voltage (V) | 85-265V ac |
| Operating Frequency | 50/60Hz |
| Class | Class 1 |
| Power Factor | >0.55 |
| Output Voltage | 42V dc |
| Output Current | 1400mA CC |
| Average Inrush Current | 2.0 A |
| Cable Info | 1m H05RN-F 3 core cable |

Luminaire Performance

| | |
|---------------------|-------|
| Lumens (lm) | 4000 |
| Lm/W | 80 |
| CRI | >65 |
| Colour Temp (K) | 4000K |
| Beam Angle | 120° |
| Average Life L70 | 30000 |
| Circuit Wattage ± % | 10 |

Lumineux LED Floodlight 50W 4000K Black

Luminaire Construction

| | |
|-------------------|-----------------|
| Product Colour | Black |
| Body Material | Aluminium |
| Diffuser Material | Toughened Glass |
| Chip Brand | Epistar |
| Driver | Meanwell |
| Led Type | COB |
| Led Qty | 1 |

Product Warranty

| | |
|----------|-------------------------|
| Warranty | 3 Year Trusted Warranty |
|----------|-------------------------|

For full warranty details please contact us.

Sensor Spec


| | |
|-----|-----|
| • - | • - |
|-----|-----|

Emergency Spec

Operating Temperature

| | |
|--------------------------|-----|
| Operating Temp. Max (°c) | +45 |
| Operating Temp. Min (°c) | -20 |

Energy Efficiency Rating

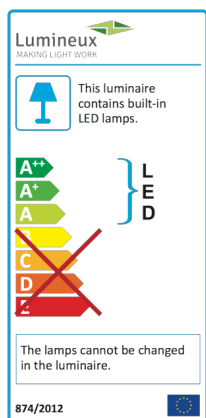

All products, product specifications and data are subject to change without notice to improve reliability, function, design or otherwise. Products may be discontinued without notice. Illustrations are for guidance purposes only. Please see company's T&Cs for further information.

