

Cetus Mini

96272526 CETUS MINI FH LED550-840 IP20 WH

THORN

LED 6W LED_CTUM_600_4K	T _a 25	IP20	IK02		CE	
------------------------	-------------------	------	------	---	----	--


Cetus Mini

An economical, fire rated, recessed LED downlight. Integrated phase-cut dimmable control gear. IP20, Class I electrical. Body: steel, painted white. Cover: polycarbonate, red and white. Bezel: aluminium, white. Suitable for mounting in ceiling thicknesses of 13-35mm in a Ø77mm cut-out. Complete with 4000K LED.


Dimensions: Ø87 x 100 mm
Total power: 5.8 W
Luminaire luminous flux: 600 lm
Luminaire efficacy: 103 lm/W
Weight: 0.5 kg



TLG_CTUM_F_FIREPDB.jpg

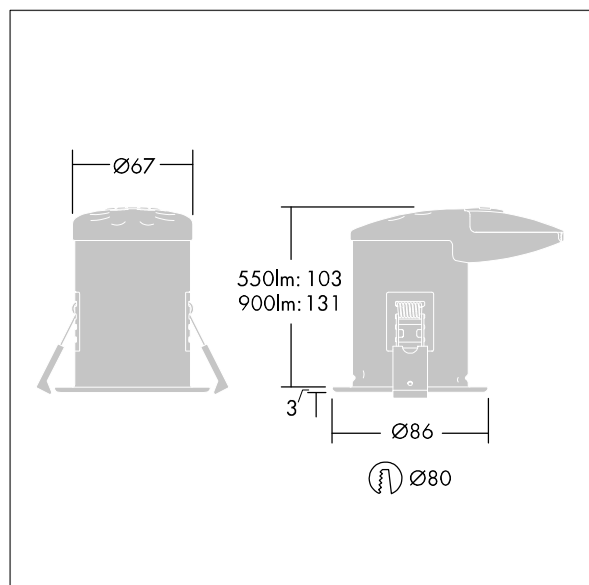

TLG_CTUM_M_FH.wmf

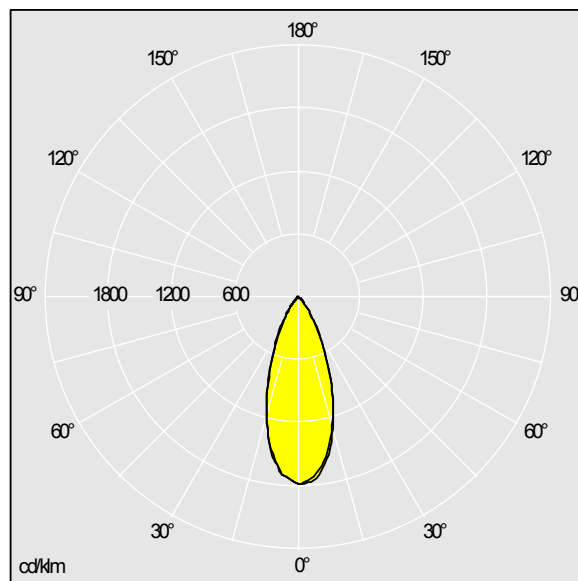

TLTP_96272526.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 600 lm
Luminaire efficacy*: 103 lm/W
Lamp efficacy: 103 lm/W
Colour Rendering Index min.: 80
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Correlated colour temperature*: 4000 Kelvin
Chromaticity tolerance (initial MacAdam)*: 5
Rated median useful life*:
40000h L70 at 25°C
Luminaire input power*: 5.8 W
Dimming: PCDCG dimmable to 20%
Maintenance category: D - Enclosed IP2X

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.

© Thorn Lighting