

Start LED Highbay

START LED HIGHBAY 4000K 20KLM EB WIDE

0039312



Product features

- LED HIGHBAY, 4000K, 20KLM, WIDE Beam



PRODUCT OVERVIEW

| | |
|--|--|
| Beam angle(°) | 85 |
| Certifications | CE |
| Colour temperature (K) | 4000 |
| Colour | Silver RAL 9006 |
| CRI (Ra) | >80 |
| Dimmable | Non-dim / not dimmable (switched only) |
| EAN code | 5410288393124 |
| Luminous flux (lm) | 21573 |
| Housing | Magnesium alloy |
| IK rating | IK08 |
| IP rating | IP65 |
| Light colour | Neutral White |
| LOR (%) | 100 |
| Mount | Surface & Suspended |
| Ordering number | 0039312 |
| Efficacy (Rated) (lm/w) | 111 |
| Average life (h) - L70/B50 | 50000 |
| Technology | LED |
| Voltage (V) | 220-240 |
| Included lamp | Integrated LED |
| Compatible with bulbs of energy class: | A+ |
| Colour consistency (SDCM) | 6 |
| Inrush Current (A) | 4 |

DATA TABLE

General data

| | |
|------------------------------|-------|
| Average life (h) at Ta 25° C | 50000 |
| Certifications | CE |

Start LED Highbay

START LED HIGHBAY 4000K 20KLM EB WIDE

0039312

| | |
|---|--|
| Control gear type | Electronic |
| Dimmable | Non-dim / not dimmable (switched only) |
| EAN code | 5410288393124 |
| Environment | Internal |
| General application | Logistics and Industry |
| Housing | Magnesium alloy |
| Mount | Surface & Suspended |
| Ordering number | 0039312 |
| Product name | START LED HIGHBAY 4000K 20KLM EB WIDE |
| Average life (h) - L70/B50 | 50000 |
| Technology | LED |
| Compatible with bulbs of energy class: | A+ |
| Product features | LED HIGHBAY, 4000K, 20KLM, WIDE Beam |
| What temperature Life is measured at (°C): | 25 |

Optical data

| | |
|----------------------------------|---------------|
| Beam angle(°) | 85 |
| Colour temperature (K) | 4000 |
| CRI (Ra) | >80 |
| Distribution type | Direct |
| Luminous flux (lm) | 21573 |
| Glare control | UGR <25 |
| Light colour | Neutral White |
| LOR (%) | 100 |
| Colour consistency (SDCM) | 6 |

Physical data

| | |
|---|-----------------|
| Colour | Silver RAL 9006 |
| Diffuser finish | Clear |
| Diffuser material | Polycarbonate |
| IK rating | IK08 |
| IP rating | IP65 |
| Lamp included | Integrated |
| Maximum distance from luminaire (cm) | 100 |
| Reflector finish | PC Lens |
| Weight (kg) | 4.5 |
| Included lamp | Integrated LED |

Electrical data

| | |
|------------------------------|---------|
| Drive current (mA) | 4200 |
| Electrical protection | CLASS I |
| Glow wire test | 650 |

Start LED Highbay

START LED HIGHBAY 4000K 20KLM EB WIDE

0039312


| | |
|------------------------------------|------------|
| Efficacy (Rated) (lm/w) | 111 |
| Ta rating (°C) | -30 to +45 |
| Total power consumption (W) | 190 |
| Voltage (V) | 220-240 |
| Inrush Current (A) | 4 |

PHOTOMETRY


| | | | | |
|-----|------|----------------|-------|---------------|
| 0.5 | 0.88 | E(0°) E(C0) | 41.3° | 8659 1059 |
| 1.0 | 1.76 | E(0°) E(C0) | 41.3° | 14140 3021 |
| 1.5 | 2.64 | E(0°) E(C0) | 41.3° | 6204 1343 |
| 2.0 | 3.51 | E(0°) E(C0) | 41.3° | 3535 755 |
| 2.5 | 4.39 | E(0°) E(C0) | 41.3° | 2282 483 |
| 3.0 | 5.27 | E(0°) E(C0) | 41.3° | 1571 336 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 82.6°)

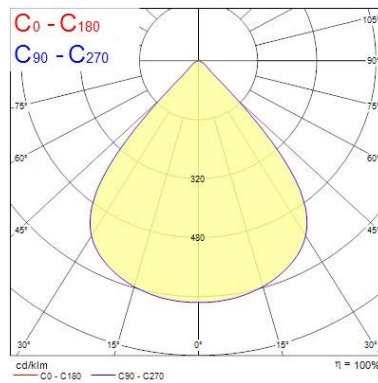

TECHNICAL DRAWINGS

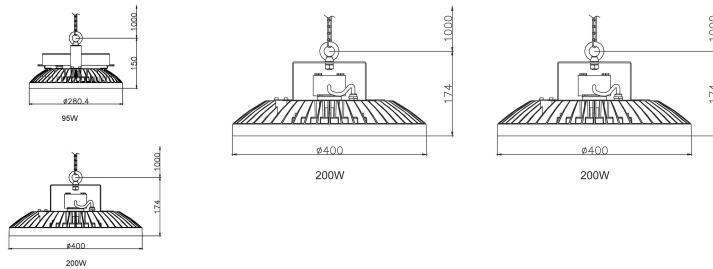



Start LED Highbay

START LED HIGHBAY 4000K 20KLM EB WIDE


0039312


SYLVANIA 0039312


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.





874/2012 

 This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.



 } **LED**

SYLVANIA 0039312  874/2012