



ENCLOSED SWITCH-DISCONNECTORS

20÷80A

2P-3P-3P+N-4P



20÷40A

2P-3P-3P+N-4P

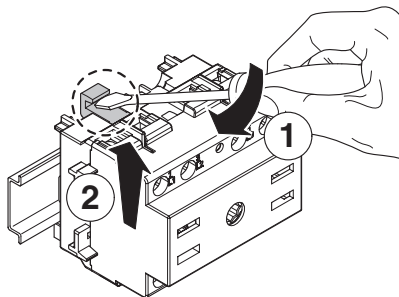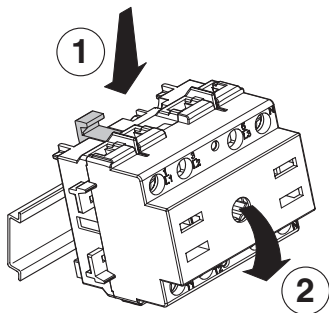

63÷80A

2P-3P-3P+N-4P

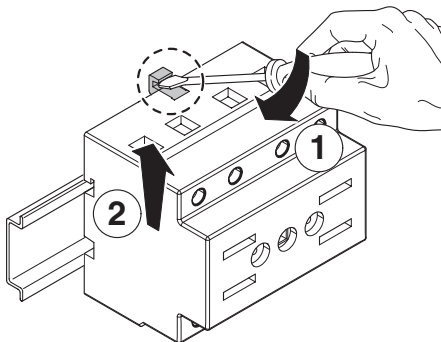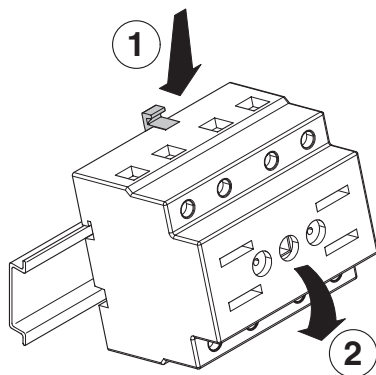

InfoTECH

ITALY

WORLDWIDE


Numero Verde





800-018009

ScameOnLine

www.scame.com

infotech@scame.com

		20÷40A 2P-3P-3P+N-4P	63÷80A 2P-3P-3P+N-4P
Wire range		1.5÷10mm ²	10-35mm ²
Tightening torque	Terminal screws	0.8Nm	3.6Nm
	Fixing screws	1.2Nm	1.2Nm
Wire strip length		10mm	13mm








ATTENTION

When mounting or removing additional elements the switch **has to be in OFF position** for avoiding damages to mechanism.







When removing main switch following instruction for avoiding damages.

THERMOPLASTIC ENCLOSURES

20÷40A
2P-3P-3P+N-4P

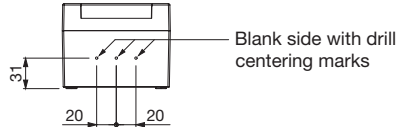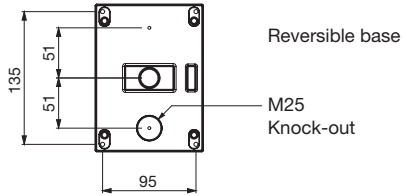
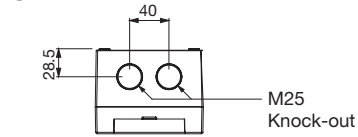



63-80A
2P-3P-3P+N-4P

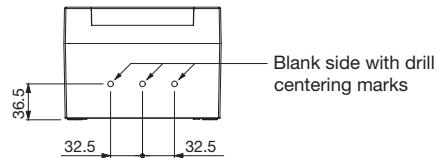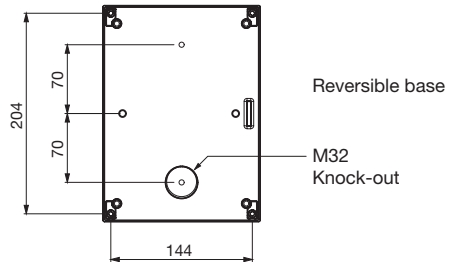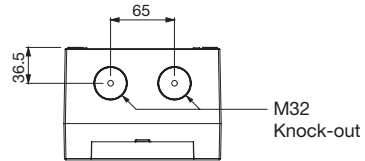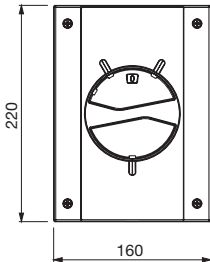


ALUMINIUM ENCLOSURES

20÷40A
2P-3P-3P+N-4P





Bottom side

1xM20+1xM25
Open threaded
cable entry
with cap






Top side

1xM20+1xM25
Open threaded
cable entry
with cap




63-80A
2P-3P-3P+N-4P

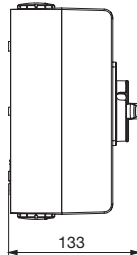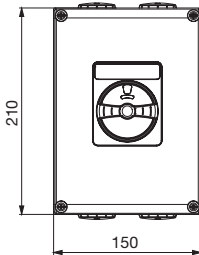

Bottom side

2xM32
Open threaded
cable entry
with cap

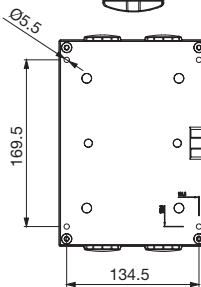

Top side

2xM32
Open threaded
cable entry
with cap

