



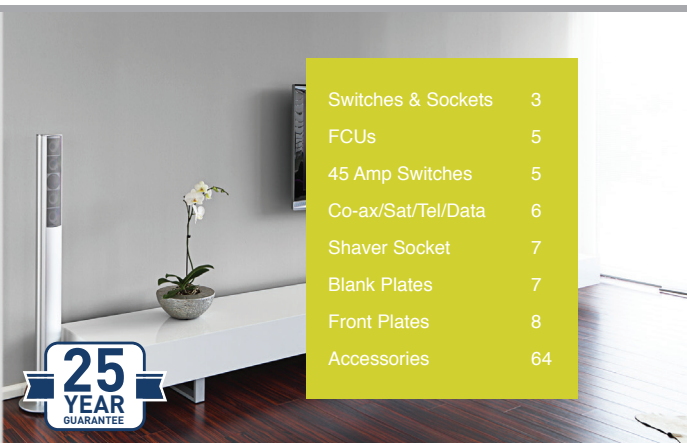

nexus flatplate wiring accessories

Slimline screwless and screwed accessories available in a range of decorative metal finishes

2 Features & Finishes

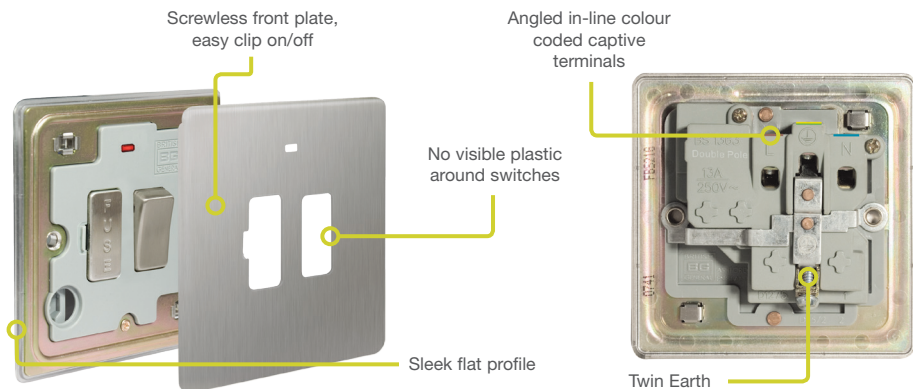

Switches & Sockets	3
FCUs	5
45 Amp Switches	5
Co-ax/Sat/Tel/Data	6
Shaver Socket	7
Blank Plates	7
Front Plates	8
Accessories	64



Nexus Screwless Flatplate is available in four stocked finishes



Brushed Steel



Polished Chrome



Black Nickel



Polished Brass

For specification projects, BG can offer a wider selection of finishes. Or, if the project demands, any finish can be created to suit the requirement. Examples include:



Matt Black



Antique Brass



Cream




Pearl Nickel

Nexus Flatplate Screwless

Cat No.		Description		Inner Carton	Outer Carton
10 Amp 10AX Switches					
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass		
FBS12	FPC12	FBN12	FPB12	10	100
FBS13	FPC13	FBN13	FPB13	10	100
FBS14	FPC14	FBN14	FPB14	10	100
FBS15	FPC15	FBN15	FPB15	10	100
FBS42	FPC42	FBN42	FPB42	10	100
FBS43	FPC43	FBN43	FPB43	10	100
FBS44	FPC44	FBN44	FPB44	5	50

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Plate switches manufactured to BS EN 60669-1, fan isolator to IEC 60669-2-4
- Minimum mounting box depth:
 - 1 & 2 gang 16mm
 - 3, 4 & 6 gang 25mm
- **Bell push switch available made to order, contact Customer Services for details

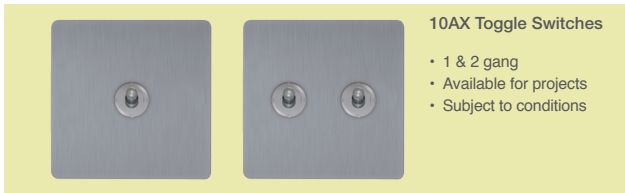

13 Amp Socket Outlets					
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass		
FBS21G	FPC21G	FBN21B	FPB21B	10	100
-	FPC21W	-	-	10	100
FBS22G	FPC22G	FBN22B	FPB22B	5	50
-	FPC22W	-	-	5	50

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS 1363 Part 2
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²



Nexus Flatplate Screwless

Cat No.	Description				Inner Carton	Outer Carton
13 Amp Switched Socket with USB Charger						
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
FBS22UW	FPC22UW	-	-	2 gang socket + 2 x USB (2.1A), White Insert	5	50
FBS22UG	FPC22UG	-	-	2 gang socket + 2 x USB (2.1A), Grey Insert	5	50
-	-	FBN22UB	-	2 gang socket + 2 x USB (2.1A), Black Insert	5	50



FPC22UG



- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS 5733 and BS EN 60930
- 2 gang switched socket with outboard rockers
- 2 x Type A USB sockets - 2.1A total output, 5V
- Ideal for charging iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- 35mm box required. (Supplied with optional 10mm spacer for 25mm box retrofit)
- 10 year guarantee

20 Amp Double Pole Switches

Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
FBS31	FPC31	FBN31	FPB31	20A DP with power indicator	10	100



FBS31



FPB31

- 20 Amp terminal capacity 3 x 1.5mm²
- Colour coded terminals with captive angled screws
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 25mm

Round Pin and Export Socket Outlets

FBS28G	FPC28G	FBN28B	FPB28B	2A unswitched socket round pin	10	100
-	FPC28W	-	-			
FBS29G	FPC29G	FBN29B	FPB29B	5A unswitched socket round pin	10	100
-	FPC29W	-	-			
FBS27G	FPC27G	FBN27B	FPB27B	13A 1 gang universal with power indicator	10	100
-	FPC27W	-	-			
FBS99G	FPC99G	FBN99B	FPB99B	15A 1 gang switched socket	10	100
-	FPC99W	-	-			
FBS98G	FPC98G	FBN98B	FPB98B	16A 2 gang unswitched Euro socket	10	100
-	FPC98W	-	-			

- 2/5/15A Manufactured to BS 546

- Mounting box depth:
13A & 15A 35mm
2A, 5A & 16A 25mm



FBS99G



FPC29W



FBN28B




FPB99W

Nexus Flatplate Screwless

Cat No.		Description		Inner Carton	Outer Carton
13 Amp Fused Connection Units					
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass		
FBS50	FPC50	FBN50	FPB50	10	100
FBS52	FPC52	FBN52	FPB52	10	100
FBS53	FPC53	FBN53	FPB53	10	100
FBS54	FPC54	FBN54	FPB54	10	100
FBS55	FPC55	FBN55	FPB55	10	100

- Manufactured to BS 1363 Part 4
- Angled colour coded terminals with captive screws
- Minimum mounting box depth 35mm
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²

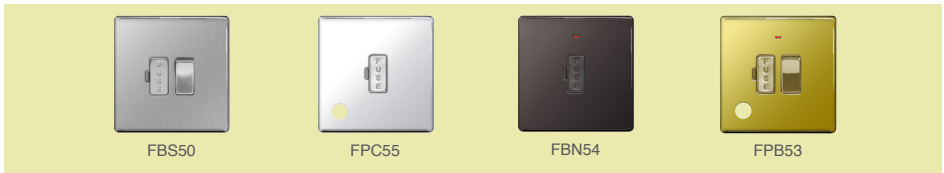

45 Amp Double Pole Switches					
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass		
FBS70G	FPC70G	FBN70B	FPB70B	With 13A socket & power indicator	5 50
-	FPC70W	-	-		5 50
FBS72	FPC72	FBN72	FPB72	Double plate, with power indicator	5 50
FBS74	FPC74	FBN74	FPB74	Single plate, with power indicator	10 50

- Cooker Control Units manufactured to BS4177, Double Pole Switches to BS EN 60669-1
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²
- Minimum mounting box depth 47mm



INSERT COLOURS: Brushed Steel = Grey Polished Chrome = White (W) and Grey (G) Black Nickel = Black Polished Brass = Black

Fan Controller					
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass		
FBS87	FPC87	FBN87	FPB87	1 gang, 1 way rotary, 100W	10 100

- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 35mm



Nexus Flatplate Screwless

Cart No.	Description				Inner Carton	Outer Carton
Co-Axial and Satellite Sockets						
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
FBS60	FPC60	FBN60	FPB60	Co-axial socket, 1 gang	10	100
FBS61+	FPC61+	FBN61+	FPB61+	Co-axial socket, 2 gang	10	100
FBS62 ⁺	FPC62 ⁺	FBN62 ⁺	FPB62 ⁺	Isolated co-axial socket, 1 gang	EM	-
FBS63 ⁺	FPC63 ⁺	FBN63 ⁺	FPB63 ⁺	Isolated co-axial socket, 2 gang	EM	-
FBS64 ⁺	FPC64 ⁺	FBN64 ⁺	FPB64 ⁺	Satellite socket, 1 gang	EM	-
FBS65+	FPC65+	FBN65+	FPB65 ⁺	Satellite and co-axial socket, 2 gang	10	100
FBS66+	FPC66+	FBN66+	FPB66 ⁺	Diplex TV/FM socket, 2 gang	10	100
FBS67+	FPC67+	FBN67+	FPB67 ⁺	Triplex TV/FM/Sat - Screened	10	100
FBS68+	FPC68+	FBN68+	FPB68 ⁺	Triplex TV/FM/Sat + Return & 1 gang Tel - Screened	5	50
FBS69 ⁺	FPC69 ⁺	FBN69 ⁺	FPB69 ⁺	Quadplex TV/FM/Sat (x2) + Return & 1 gang Tel - Screened	EM	-

• EM = Euro Module configuration

• ⁺ Supplied as kit of Euro Module components

• TV/FM mounting box depth 25mm, Triplex 35mm

• Insert colours -

Polished Chrome = White, Brushed Steel = Grey

Black Nickel = Black, Polished Brass = Black

* See our Euro Module range for further Telecom, Data and Co-axial Options



FBS60



FPC60



FBN67



FPB69

Telephone and Data Outlets

Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
FBSBTM1	FPCBTM1	FBNBTM1	FPBBTM1	Telephone master, 1 gang	10	100
FBSBTM2 ⁺	FPCBTM2 ⁺	FBNBTM2 ⁺	FPBBTM2 ⁺	Telephone master, 2 gang	10	100
FBSBTS1	FPCBTS1	FBNBTS1	FPBBTS1	Telephone slave, 1 gang	10	100
FBSBTS2 ⁺	FPCBTS2 ⁺	FBNBTS2 ⁺	FPBBTS2 ⁺	Telephone slave, 2 gang	10	100
FBSRJ111	FPCRJ111	FBNRJ111	FPBRJ111	RJ11 socket, 1 gang	10	100
FBSRJ112 ⁺	FPCRJ112 ⁺	FBNRJ112 ⁺	FPBRJ112 ⁺	RJ11 socket, 2 gang	10	100
FBSRJ451	FPCRJ451	FBNRJ451	FPBRJ451	RJ45 data outlet socket, 1 gang	10	100
FBSRJ452 ⁺	FPCRJ452 ⁺	FBNRJ452 ⁺	FPBRJ452 ⁺	RJ45 data outlet socket, 2 gang	10	100

• ⁺ Supplied as kit of Euro Module components

• Minimum mounting box depth 35mm

• Manufactured to BS 6312 Part 2 where applicable

• Modules available to make up any combination of RJ11, BT and RJ45

* See our Euro Module range for further Telecom, Data and Co-axial Options



FBSBTM1



FPCBTM2



FBNRJ451



FPBRJ112

Nexus Flatplate Screwless

Cat No.	Description				Inner Carton	Outer Carton
Dimmer Switches - Push On/Off						
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
FBS81P	FPC81P	FBN81P	FPB81P	1 gang, 2 way, 400W	10	100
FBS82P	FPC82P	FBN82P	FPB82P	2 gang, 2 way, 400W	10	100
FBS83P	FPC83P	FBN83P	FPB83P	3 gang, 2 way, 400W	5	50
FBS84P	FPC84P	FBN84P	FPB84P	4 gang, 2 way, 400W	5	50
FBS85P	FPC85P	FBN85P	FPB85P	1 gang, 1,000W - square plate (export only)	10	100

- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 10mm spacer available to provide additional wiring space (817 - Sq, 818 - Rect)
- Suitable for compact fluorescent lamps (CFL) and LED Dimming
- LED & CFL dimming compatible. Features adjustable minimum level to adjust low level output & stabilise load.



Shaver Socket						
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
FBS20G	FPC20W	FBN20B	FPB20B	115/230V dual voltage	10	100
-	FPC20G	-	-		10	100

- Terminal capacity 3 x 2.5mm² & 2 x 4.0mm²
- Minimum mounting box depth 47mm
- Manufactured to BS EN 61558-1 and BS EN 61558-2-5



Blank Plates						
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
FBS94	FPC94	FBN94	FPB94	1 gang	5	50
FBS95	FPC95	FBN95	FPB95	2 gang	10	100


- Manufactured to BS 5733
- Fitted with Earth terminal



Nexus Flatplate Screwless

Cat No.		Description		Inner Carton	Outer Carton
Euro Module Front Plates					
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass		
FBSEMS1	FPCEMS1	FBNEMS1	FPBEMS1	Single Euro Module, single plate	10 100
FBSEMS2	FPCEMS2	FBNEMS2	FPBEMS2	Twin Euro Module, single plate	10 100
FBSEMR4	FPCEMR3	FBNEMR4	FPBEMR4	Quad Euro Module, double plate	5 50

- Fitted with Earth terminal

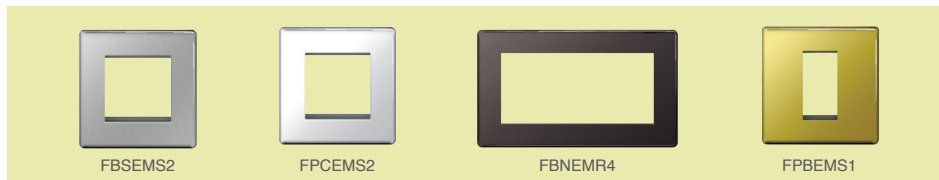


16 Amp Hotel Key Card Switch					
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass		
FBSKYCSG ⁺	FPCKYCSW ⁺	FBNKYCSB ⁺	FPBKYCSB ⁺	16 amp, hotel key card switch	EM -



- 50 x 50mm Euro module
 - Load Rating - 1800W for resistive 800W for inductive
 - 30 second power-off delay
 - Locator LED
 - Mounting box depth 47mm
 - Colour coded terminals with backed-out and captive screws
 - Designed and manufactured to BS EN60669-4
- ⁺ Supplied as kit of Euro Module components

Spare Accessories			
FPFS17/10	M3.5 x 17mm screws, pack of 10	100pks	1000
FPFS26/10	M3.5 x 26mm screws, pack of 10	100pks	1000
FPFS36/10	M3.5 x 36mm screws, pack of 10	100pks	1000

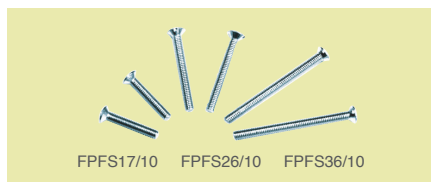

Euro Module - Range Extension

A flexible solution of power, data, telephone, television and audio combinations to suit the wide ranging needs of the customer.

- Select the desired combination of front plate and module(s)
- Simple installation, wire the module through the front plate aperture then click the module into place
- Modules of mains and extra low voltage rating must not be fitted to the same front plate aperture Ref. BS 7671 :2008



For full information see our [Euro Module Range](#)

Grid - Range Extension

A customisable selection of power grid modules that provide a seamless appearance with the associated wiring accessories.

- Select the desired combination of front plate, frame and grid module(s)
- Simple installation, wire the module through the front plate aperture then click the module into place



For full information see our [Nexus Grid](#)

Nexus Flatplate Screwed



Cat No.			Description	Inner Carton	Outer Carton
10 Amp 10AX Switches					
Brushed Steel	Polished Chrome	Black Nickel			
SBS12	SPC12	SBN12	1 gang, 2 way	10	100
SBS13	SPC13	SBN13	Intermediate	10	100
SBS15	SPC15	SBN15	3 pole fan isolator	10	100
SBS42	SPC42	SBN42	2 gang, 2 way	10	100
SBS43	SPC43	SBN43	3 gang, 2 way	10	100

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Plate switches manufactured to BS EN 60669-1, fan isolator to IEC 60669-2-4
- Minimum mounting box depth 16mm



13 Amp Socket Outlets					
SBS21G	SPC21G	SBN21G	1 gang	10	100
SBS22G	SPC22G	SBN22G	2 gang	5	50



- Manufactured to BS 1363 part 2
- Twin earth fitted as standard to allow double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²

Nexus Flatplate Screwed

Cat No.			Description	Inner Carton	Outer Carton
13 Amp Switched Socket with USB Charger					
Brushed Steel	Polished Chrome	Black Nickel			
SBS22UG	SPC22UG	SBN22UG	2 gang SP, switched, outboard rockers + 2 x USB (2.1A)	10	100




- 2 gang switched socket with outboard rockers
 - 2 x Type A USB sockets - 2.1A total output, 5V
 - Charges iPad, iPhone, tablets, mobiles, cameras and more
 - Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
 - Minimum mounting box depth 25mm - ideal for retrofit
 - Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
 - Manufactured to BS 5733 and BS EN 60950
- *25 Year guarantee not applicable on USB sockets

20 Amp Double Pole Switches					
SBS31	SPC31	SBN31	20A DP switch with power indicator	10	100



- 20 Amp Terminal capacity 3 x 1.5mm²
- Colour coded terminals with captive angled screws
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 25mm

13 Amp Fused Connection Units					
SBS52	SPC52	SBN52	Switched with power indicator	10	100
SBS54	SPC54	SBN54	Unswitched with power indicator	10	100

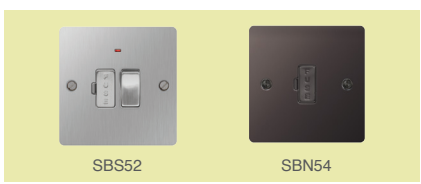

- Manufactured to BS 1363 part 4
- Angled colour coded terminals with captive screws
- Minimum mounting box depth 35mm
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²


45 Amp Double Pole Switches					
SBS70G	SPC70G	SBN70G	Switched with 13A socket & power indicator	5	50
SBS72	SPC72	SBN72	Switched with power indicator, double plate	5	50
SBS74	SPC74	SBN74	Switched with power indicator, single plate	10	100

- Manufactured to BS 4177 and BS EN 60669-1
- Minimum mounting box depth 47mm
- Cooker Control Units manufactured to BS4177, Double Pole Switches to BS EN 60669-1
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²



Nexus Flatplate Screwed

Cat No.	Description	Inner Carton	Outer Carton
13 Amp Floor Socket Outlets			
SBS23G/FR	1 gang	10	100
SBS24G/FR	2 gang	5	50

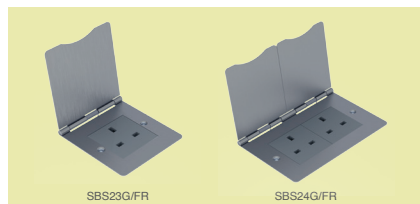


- With spring hinged cover
- Manufactured to BS 1363 part 2
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²

Co-Axial And Satellite Sockets					
Brushed Steel	Polished Chrome	Black Nickel			
SBS60	SPC60	SBN60	Co-axial socket 1 gang	10	100



- Minimum mounting box depth 25mm
- Manufactured to BS 5733 where applicable
- * See our Euro Module range for further Telecom, Data and Co-axial options

Telephone Outlets					
SBSBTM1	SPCBTM1	SBNBTM1	Telephone master 1 gang	10	100
SBSBTS1	SPCBTS1	SBNBTS1	Telephone slave 1 gang	10	100

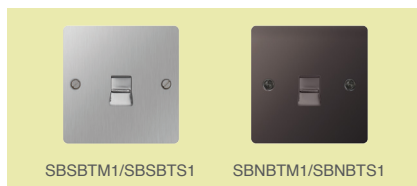

- Minimum mounting box depth 35mm
- Manufactured to BS 6312
- * See our Euro Module range for further Telecom, Data and Co-axial options

Dimmer Switches - Push On/Off					
SBS81P	SPC81P	SBN81P	1 gang, 2 way, 400W	10	100
SBS82P	SPC82P	SBN82P	2 gang, 2 way, 400W	10	100



- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 10mm spacer available to provide additional wiring space (817 - Sq, 818 - Rect)
- Suitable for compact fluorescent lamps (CFL) and LED Dimming
- There can be issues with dimming CFL and LED lamps at a low lighting level. The Nexus dimmer products have an adjustable minimum level feature which can be used to adjust the lighting output at a low level, to stabilise the load.

Nexus Flatplate Screwed

Cat No.			Description	Inner Carton	Outer Carton
Shaver Socket					
Brushed Steel	Polished Chrome	Black Nickel			
SBS20G	SPC20G	SBN20G	Shaver socket 115/230V dual voltage	10	100



- Manufactured to BS EN 61558-1 and BS EN 61558-2-5
- Terminal capacity 3 x 2.5mm² & 2 x 4.0mm²
- Minimum mounting box depth 47mm

Blank Plates					
SBS94	SPC94	SBN94	1 gang	10	100
SBS95	SPC95	SBN95	2 gang	5	50




- Manufactured to BS 5733
- Fitted with Earth terminal

Euro Module Front Plates					
SBSEMS1	SPCEMS1	SBNEMS1	Single Euro Module, single plate	10	100
SBSEMS2	SPCEMS2	SBNEMS2	Twin Euro Module, single plate	10	100
SBSEMR4	SPCEMR4	SBNEMR4	Quad Euro Module, double plate	5	50

- Manufactured to BS 5733
- Fitted with Earth terminal



Spring Hinged Cover Euro Module Front Plates					
SBSEMS2/FR	Brushed Steel 2 module - square			10	100
SBSEMR4/FR	Brushed Steel 4 module - rectangular			10	100

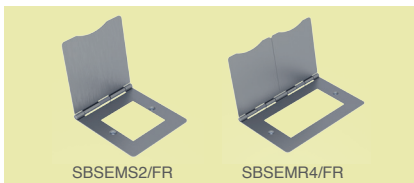

- Ideal for floor sockets

Nexus Flatplate Screwed

Cat No.	Description	Inner Carton	Outer Carton
13 Amp Double Pole Key Controlled Socket Outlet SBSKYSWG ⁺	13A switched socket	EM	-



- Manufactured to BS 1363-2, BS EN 60669-1
- Mounting box depth 47mm
- Terminal capacity: 3 x 2.5mm², 2 x 4.0mm², 1 x 6.0mm²
- Lockable socket, supplied with two keys
- DP switch
- + Supplied as kit of Euro Module components


Euro Module - Range Extension

A flexible solution of power, data, telephone, television and audio combinations to suit the wide ranging needs of the customer.

- Select the desired combination of front plate and module(s)
- Simple installation, wire the module through the front plate aperture then click the module into place

Front Plate

Module(s)

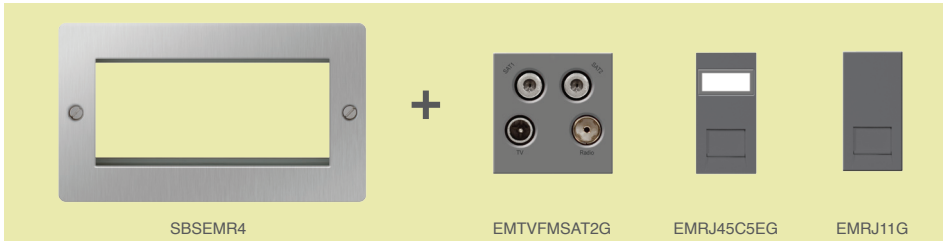

Finish



For full information see our Euro Module range

Notes:

Head Office

Email: info@luceco.com

Luceco Ltd
Caparo House,
103 Baker Street, London,
United Kingdom, W1U 6LN

UK:

Tel: +44 (0) 1952 238 100
Fax: +44 (0) 1952 238 180
Email: sales@luceco.com

Nexus Industries Ltd
Nexus Distribution Centre
Stafford Park 1, Telford,
Shropshire, England, TF3 3BD

Germany:

Tel: +49 40 89066 8780
Fax: +49 40 89066 87829
Email: eu_sales@nexusinds.com

Nexus Industries GmbH
Holstenplatz 20b
22765 Hamburg, Germany

France:

Tel: +33 (0)7 88 29 56 59
Fax: +33 (0)1 5731 74 19
Email: fr_sales@nexusinds.com

Nexus Industries SAS
France & Belux
3 Rue de Courtaïn
Magny Le Hongre 77700
FRANCE & BELUX

Italy:

Tel: +39 0434 1696795
Fax: +39 0434 1696795
Email: it_sales@nexusinds.com

Nexus Italia, Via Amman 10
33170 Pordenone, Italy

Spain:

Tel: +34 93 829 55 75
Email: sp_sales@nexusinds.com

Nexus Industries LTD
C/ Bobinadora 1-5
08302 Mataró
Barcelona (SPAIN)

Middle East:

Tel: +971 4 609 1867
Fax: +971 4 609 1868
Email: mea_sales@
nexusinds.com

Luceco Middle East FZE
Bldg. 5EB, Office 342,
PO Box 371128, DAFZA,
Dubai, UAE.

Asia Pacific:

Tel: +86 (0) 573 8357 0200
Fax: +86 (0) 573 8357 0248
Email: asia_sales@nexusinds.cn

No 1438, Jiachuang Road,
Xiuzhou Industrial Park, Jiaxing,
Zhejiang, China, P.C. 314031

North & South America:

Tel: +1 281 978 2509
Fax: +1 281 466 4620
Email: us_sales@luceco.com

Luceco Inc
11050 West Little York Road
Building C-2, Houston, Texas,
USA 77041

Africa:

Tel: +27 11 432 6779
Fax: +27 86 219 2099
Email: africa_sales@nexusinds.com

Unit 2, Cedar Wood Office Park
Cnr. Western Service and
Mount Lebanon Road Woodmead
South Africa, 2144

LUCECO

a Luceco Ltd. Group company



LUCECO

www.bgelectrical.uk